




Our **Quiklink bale ties (Double Loop)** are all manufactured using ultra high tensile spring wire. Quiklink reduces your overall installed cost on your baling procedure with it's quick link tying method.

Available in 8.5 - 14 gauge and from 5' to 21' in 6 inch increments. Quiklink keeps bales square because the wire does not elongate, thereby reducing your freight costs.

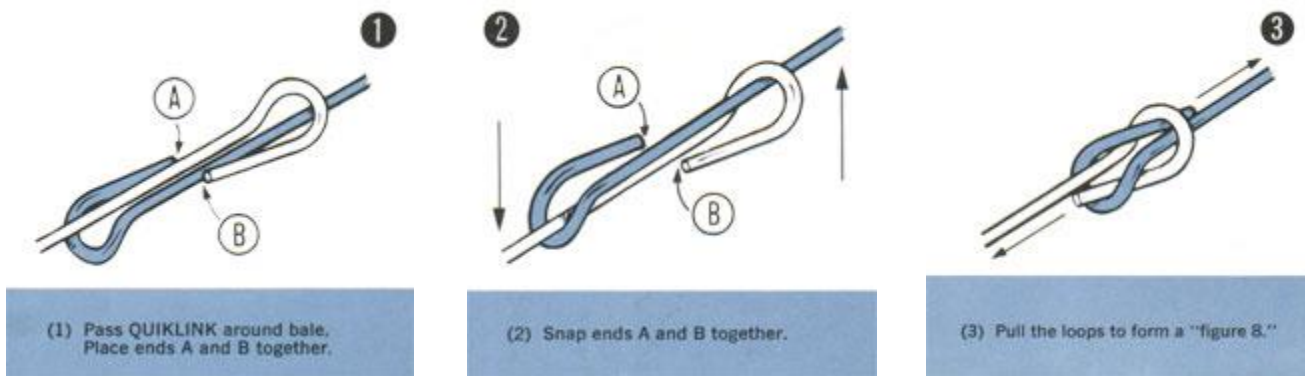

Example Spec;

| Gauge | Diameter | Break Load | Tensile (KSI) | Weight of coat (oz/ft ²) |
|-------|----------|------------|---------------|--------------------------------------|
| 10 | 0.1350 | 3360 | 230000 | Commercial |
| 11 | 0.1190 | 2350 | 211000 | Commercial |